



SOUTH AMERICA

542 Brazilian Plug 2 pole STRAIGHT




STANDARD NBR NM 60884-1, NBR 14136

VOLTAGE 250V

CURRENT 10A

CABLE TYPE

H03VVH2-F	2X0.5; 2X0.75
H03V2V2-F	2X0.75
H03V2V2H2-F	2X0.75
H03VV-F	2X0.5; 2X0.75
H05VVH2-F	2X0.75
H05V2V2-F	2X0.75; 2X1; 2X1.5
H05V2V2H2-F	2X0.75; 2X1
H05VV-F	2X0.75; 2X1
H05RR-F	2X0.75; 2X1
H05RN-F	2X0.75; 2X1
H07RN-F	2X1; 2X1.5

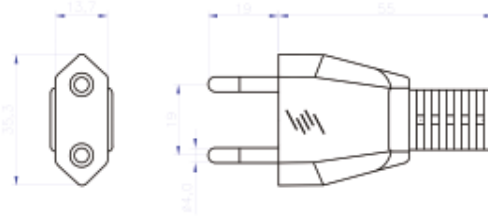

540 Brazilian Plug 2 pole + STRAIGHT




STANDARD NBR NM 60884-1, NBR 14136

VOLTAGE 250V

CURRENT 20A

CABLE TYPE

H05VV-F	2X1; 2X1.5
H05RR-F	2X1; 2X1.5
H05V2V2-F	2X1.5; 2X2.5
H07RN-F	2X1; 2X1.5; 2X2.5

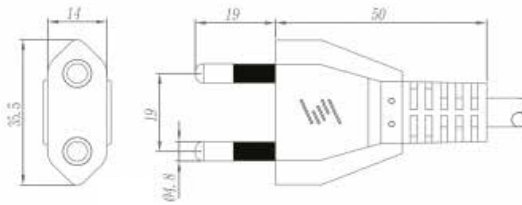

537 Brazilian Plug 2 pole + E STRAIGHT




STANDARD NBR NM 60884-1, NBR 14136

VOLTAGE 250V

CURRENT 10A

CABLE TYPE

H05VV-F	3G0.75; 3G1; 3G1.5
H05RR-F	3G0.75; 3G1; 3G1.5
H05RN-F	3G0.75; 3G1
H07RN-F	3G1; 3G1.5

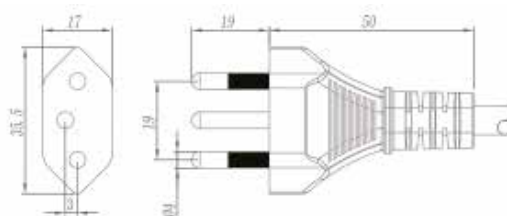

538 Brazilian Plug 2 pole + E STRAIGHT




STANDARD NBR NM 60884-1, NBR 14136

VOLTAGE 250V

CURRENT 20A

CABLE TYPE

H05VV-F	3G1; 3G1.5
H07RN-F	3G1; 3G1.5

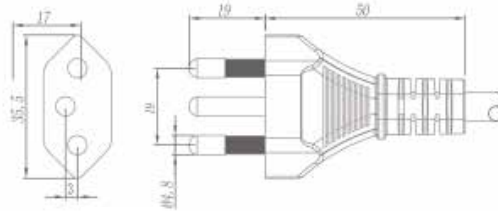

167 Argentina Plug 2 pole STRAIGHT




STANDARD IRAM 2063:2009

VOLTAGE 250V

CURRENT 10A

CABLE TYPE

H03VV-F	2X0.75; 2X1
H05VVH2-F	2X0.75; 2X1
H05VV-F	2X0.75; 2X1; 2X1.5
H05RR-F	2X0.75; 2X1; 2X1.5
H05V2V2-F	2X0.75; 2X1; 2X1.5
H05RN-F	2X0.75; 2X1
H05BQ-F	2X1; 2X1.5
H07RN-F	2X1; 2X1.5
H07BQ-F	2X1; 2X1.5

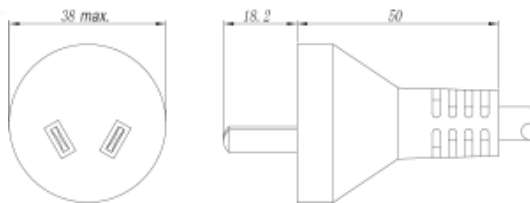

168 Argentina Plug 2 pole + E STRAIGHT




STANDARD IRAM 2073:2009

VOLTAGE 250V

CURRENT 10A

CABLE TYPE

H03VV-F	3G0.75
H05VV-F	3G0.75; 3G1; 3G1.5
H05V2V2-F	3G0.75; 3G1; 3G1.5
H05RR-F	3G0.75; 3G1; 3G1.5
H05RN-F	3G0.75; 3G1
H05BQ-F	3G0.75; 3G1; 3G1.5
H07RN-F	3G1; 3G1.5
H07BQ-F	3G1; 3G1.5

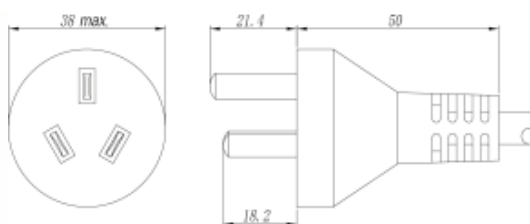

169 Argentina Plug 2 pole + E ANGLED



STANDARD IRAM 2073:2009

VOLTAGE 250V

CURRENT 20A

CABLE TYPE

H05VV-F	3G1; 3G1.5
H05RR-F	3G1; 3G1.5
H05RN-F	3G1
H07RN-F	3G1; 3G1.5
H07BQ-F	3G1; 3G1.5

